


PAS68 Static Bollards EAG07000

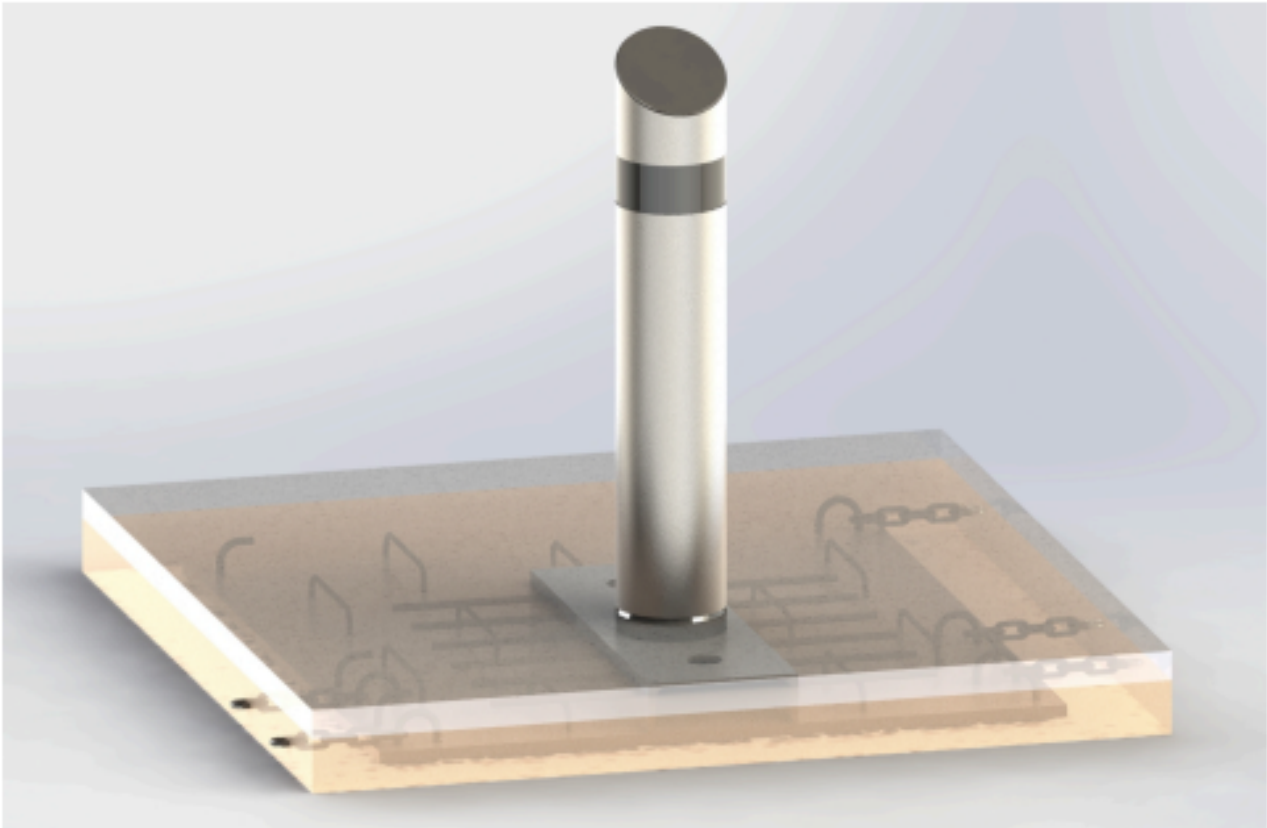

### Product Summary

Eagle Automation has a comprehensive range of PAS68 tested static bollards including the worlds first surface mount bollard, ultra-shallow foundation bollards, a shallow foundation single unit bollard and mid depth foundation bollards. We also offer a range of different diameters with many of our bollards having removable options. This includes:

#### Model EAG070-20SH

A zero penetration super slim shallow foundation bollard with a 159mm diameter tested with the N1 3.5 tonne vehicle at 48kph.

Diameter: 159mm

Vehicle: 3.5 tonne (N1)

Impact Speed: 48kph (30mph)

Penetration: P1



## PAS68 Static Bollards EAG07000

### Model EAG070-30SM

The worlds first surface mounted bolt down bollard tested with the N2 7.5 ton vehicle at 48kph. This can be bolted to existing concrete bases and suspended slabs.

Diameter: 219mm

Vehicle: 7.5T tonne (N2)

Impact Speed: 48kph (30mph)

Penetration: P2

### Model EAG070-30SH

This shallow foundation bollard has been nicknamed "bollard in a box" as this is one of the first bollards on the market that is supplied complete with integral re-bar. It was also the first shallow static bollard to be tested as a single unit with single foundation. This bollard was tested with the N2 7.5 ton vehicle at 48kph.

Diameter: 219mm

Vehicle: 7.5T tonne (N2)

Impact Speed: 48kph (30mph)

Penetration: 1.1m

### Model EAG070-30ST

With options for both a 193mm and 219mm bollard, these have been tested with the N2 7.5ton vehicle at 48kph.

Diameter: 193mm/219mm

Vehicle: 7.5T tonne (N2)

Impact Speed: 48kph (30mph)

Penetration: P1

### Model EAG070-40SH

This is our super shallow foundation bollard requiring just 125mm depth. A 219mm or 273mm bollard can be used with this product. It has been tested with the N2 7.5ton vehicle at 64kph.

Diameter: 219mm/273mm

Vehicle: 7.5T tonne (N2)

Impact Speed: 64kph (40mph)

Penetration: P2

### Model EAG070-40ST

[worldofesf.com](http://worldofesf.com)

E [sales@worldofesf.com](mailto:sales@worldofesf.com)

T UK +44 (0) 2890 364 101

US 1-888-601-6444



ISO  
9001 : 2015  
REGISTERED



Irish Security  
Industry Association

**Environmental Street Furniture**

Valley Business Centre

67 Church Road

Newtownabbey

Belfast, BT36 7LS



Company No. NI 615794

VAT GB 153402248



## PAS68 Static Bollards EAG07000

With options for both a 219mm and 273mm bollard, these have been tested with the N2 7.5ton vehicle at 64kph.

Diameter: 219mm/273mm

Vehicle: 7.5T tonne (N2)

Impact Speed: 64kph (40mph)

Penetration: From zero

### Model EAG070-50ST

This bollard has a diameter of 273mm and has been tested with both the N2 and N3 7.5ton vehicle at 80kph.

Diameter: 273mm

Vehicle: 7.5T tonne (N2 and N3)

Impact Speed: 80kph (50mph)

Penetration: From zero

[worldofesf.com](http://worldofesf.com)

E [sales@worldofesf.com](mailto:sales@worldofesf.com)

T UK +44 (0) 2890 364 101

US 1-888-601-6444



ISO  
9001 : 2015  
REGISTERED



fsb<sup>®</sup>



Irish Security  
Industry Association

**Environmental Street Furniture**  
Valley Business Centre  
67 Church Road  
Newtownabbey  
Belfast, BT36 7LS



Company No. NI 615794

VAT GB 153402248