

AUTOMATIC TERRA QUANTUM BOLLARD



Pictured here as a Dual Terra Quantum Bollard system



The Innovative Side Folding HVM Bollard has been successfully impact tested to PAS 68 with 7.5t @ 30mph.

- PAS 68 Terra Quantum Bollard 7.5t @ 30mph
- V/7500[N2]/48/90:0.0/1.5

Tested dimensions: lift height 925mm



ESF
Secure

BENEFITS & FEATURES

- The Terra Quantum Bollard Innovative Direction of Travel - Side Folding Bollard uniquely raises and lowers
- The Retractable Bollard is hydraulically driven, and twinned with a static unit
- Each bollard has a manual hydraulic power unit including hydraulic reservoir; manual hand pump and manual release valve within the bollard enclosure
- 2no. Terra Quantum Bollards back to back form a 4m clear aperture
- The Terra Quantum Bollard can be retrofitted into an existing line of PAS 68 static bollards to provide an HVM access point
- Control cabinet or self contained unit depending on configuration

FINISH OPTIONS

- Polyester Powder Coated
- Stainless Steel Clad

OPTIONS

- Manual hand pump allows a number of operations in power failure mode



Quantum Bollards in the raised position

SAFETY

- Hold to run control
- Safety Photocell Beams

OPERATING SPEED

- Typical speeds of 12 seconds

CIVIL REQUIREMENTS

L: 2350 x W: 1000 x D: 450


Control Cabinet Foundation

L: 800 x W: 800 x D: 300

Note: Power and control wiring ducts may be required

ELECTRICAL REQUIREMENTS

- Single Phase
- Depending on configuration
- This is subject to a risk assessment to ensure the automatic equipment complies to BS EN 12453

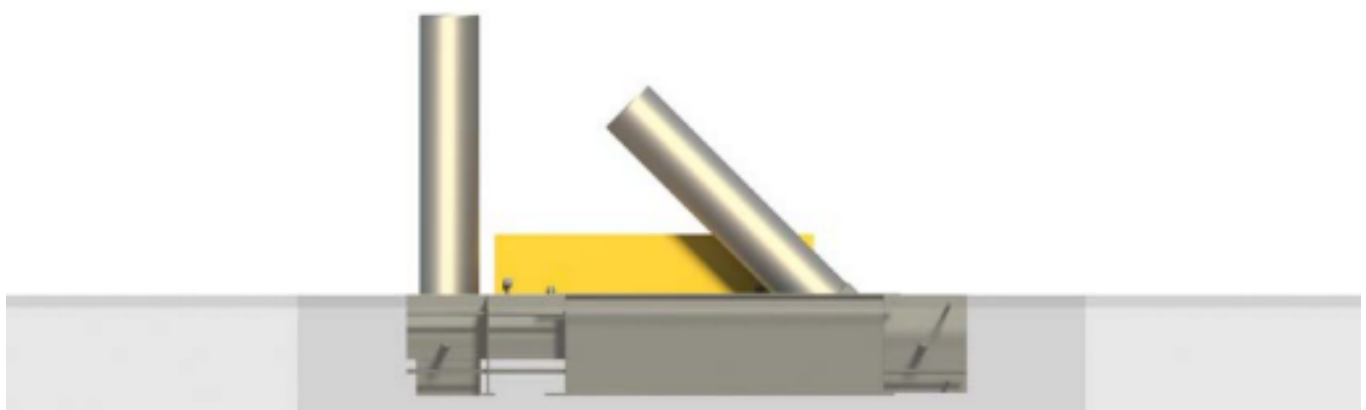

Applications: Sites with limited foundation depths that requires a PAS68 restriction on vehicle access whilst allowing free passage by pedestrians

worldofesf.com

E sales@worldofesf.com

T UK +44 (0) 2890 364 101

US 1-888-601-6444



ISO 9001 : 2015 REGISTERED



Environmental Street Furniture
Valley Business Centre
67 Church Road
Newtownabbey
Belfast, BT36 7LS



Company No. NI 615794

VAT GB 153402248